


# 04614 BLACK CF

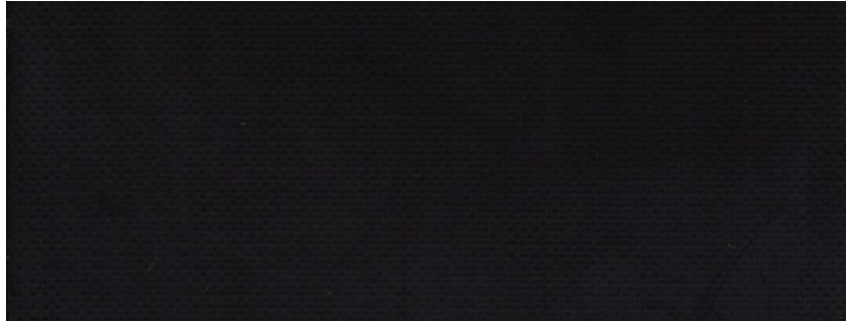

Product	Product category	Coating
PTFE KEVLAR® FABRIC	KEVLAR® SERIES	PTFE

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	1600	mm	63	inches
Nominal thickness	0,45	mm	0.0177	inches
Weight	710	gr/m <sup>2</sup>	20.94	oz/sq yd
PTFE content	59	%	59	%
Tensile strength	1700	N/5 cm	194	Ibs/inches
Temperature resistance	-73 to +220	°C	-100 to +428	°F

04614 BLACK CF is a PTFE coated woven aramid fabric with specially developed outer layers. The special finishing of this product significantly improves wear and abrasion characteristics, enhances the performance and durability. Typical applications include a range of production environments that require high speed conveyor belting and/or high moisture environments.

The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



This product has been manufactured in a facility certified by ISO 9001 Quality Management System.

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum.  
 Nominal thickness tolerance: ±0,03 mm - Weight tolerance g/m<sup>2</sup> = ±%5 - Tensile strength tolerance -%10  
 All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.  
 All data is subject to change without notice.