


2000 N

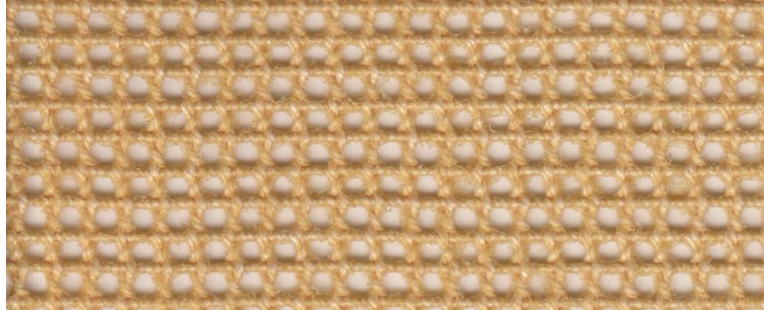

Product	Product category	Coating
NOMEX DRYER BELT	OPEN MESH SERIES	SPECIAL IMPREGNATION

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	2050, 3350	mm	81, 132	inches
Nominal thickness	1,75	mm	0.0689	inches
Weight	680	gr/m ²	20.06	oz/sq yd
Mesh size	3 x 3	mm	0.118 x 0.118	inches
Tensile strength	5700	N/5 cm	651	lbs/inches
Elongation	< 1	% at 7 kg/cm	< 1	% at 40 lbs/in
Temperature resistance	+220	°C	+428	°F

Attention!

During the processes of heating up and cooling down of the oven; the belt should not be stopped, it must be running.



This product has been manufactured in a facility certified by ISO 9001 Quality Management System.

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum.

Nominal thickness tolerance: ±0,1 mm - Weight tolerance g/m² = ±%5 - Tensile strength tolerance -%10

All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.

All data is subject to change without notice.