


FIBERLAM RT238

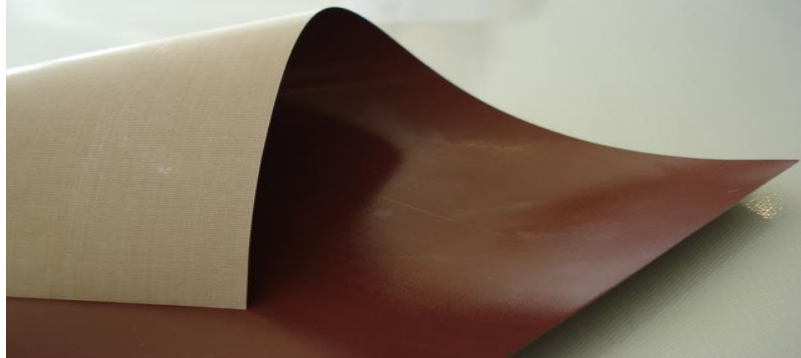

Product	Product category	Lamination
PTFE CAST FILM LAMINATED GLASS FABRIC	FIBERLAM SERIES	MULTILAYER PTFE CAST FILM

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	1200, 1320	mm	47.3, 52	inches
Nominal thickness	0,19	mm	0.0075	inches
Weight	360	gr/m ²	10.62	oz/sq yd
PTFE content	73	%	73	%
Tensile strength	1700	N/5 cm	194	Ibs/inches
Tear strength - warp x weft	60 x 30	N	14 x 7	Ibs
Temperature resistance	-150 to +260	°C	-238 to +500	°F

FIBERLAM RT238 laminated product features multi-layer PTFE cast film laminated of a 2 ply laminated PTFE / glass fabric, uniform thickness, crack and pinhole free surface. Red color side is suggested working surface.

FDA Compliant: Suitable for use in direct food contact applications under the applicable requirements of, 21CFR 177.1550

Applications: Flour tortilla machine conveyor belts.

The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



This product has been manufactured in a facility certified by ISO 9001 Quality Management System.

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum.

Nominal thickness tolerance: ±0,01 mm - Weight tolerance g/m² = ±%5 - Tensile strength tolerance -%10

All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.

All data is subject to change without notice.