


## S01



**Brown Mat  
(with red edge)**

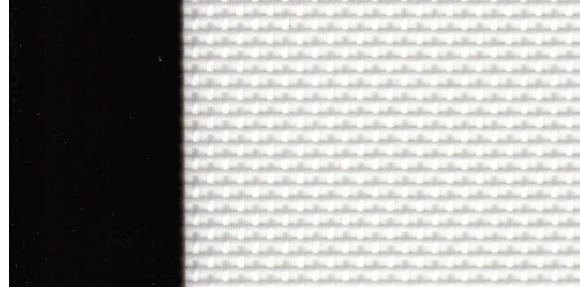

**White Mat  
(with black edge)**

Product	Product category	Coating
SILICONE LSR COATED GLASS FABRIC	SILICONE BOTH SIDE	SILICONE LSR

Properties	Metric		Imperial	
Nominal thickness	0,57	mm	0.0224	inches
Weight	760	gr/m <sup>2</sup>	22.42	oz/sq yd
Temperature resistance	-70 to +260	°C	-158 to +500	°F

Non-stick, flexible silicone mat makes for a great surface to prepare dough and pastries. It replaces parchment paper and greasy sprays when used in the oven for baking, and dissipates heat rapidly to prevent burning of cookies or pastries. Produced from FDA approved materials, it is safe for use in conventional ovens up to +260°C / +500°F.

How to use: It should be dry and clean before use. Do not grease. Never use sharp objects over on it. Do not cut. Do not fold. Wipe the oven mat with a damp sponge after use. Warm water can be used for washing. Do not use scrapers or brushes for cleaning.

The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



This product has been manufactured in a facility certified by ISO 9001 Quality Management System.

Note: Nominal thickness and weight values are typical and are not intended as a specification minimum.

Nominal thickness tolerance: ±0,03 mm - Weight tolerance g/m<sup>2</sup> = ±%5

All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.

All data is subject to change without notice.